

CRIBLOCKER



COST REDUCTION



TIME SAVING



CONTROL



REPORTING



24/7 ACCESS

CRIBSPOT®

CRIBSPOT® INTERNATIONAL SP.Z O.O
Poland, 55-100 Trzebnica, Nowy Dwór 53
Tel.: +48 665 477 237
Email: kontakt@cribspot.eu



www.cribspot.eu

CRIBLOCKER

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.




KEY FEATURES

- 24/7 access.
- **Drop in** the consumption of products by **up to 50%**.
- Extensive **product returns** function.
- Power tool **charging capability**.
- **Large capacity**, 128 storage compartments in the machine or 1256 including drawers.
- **2 options for loading** products into the machine.
- **21" touch screen** with modern and intuitive interface.
- **Configuration** as required.
- Built-in **RFID reader, barcode** and **QR code scanner**.
- **Monitoring of current status** via the IRSYSTEM web application.
- **Modularity** allows to combine devices into **sets**.

IRSYSTEM APPLICATION

For each machine we offer proprietary **IRSYSTEM software** tailored to individual customer needs, which opens up **unlimited possibilities for remote process management**. IRSYSTEM enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- automatic **generation of reports** and orders
- real-time **preview of available stock levels** inside the machine
- management of employee **access authorisation** to the machine

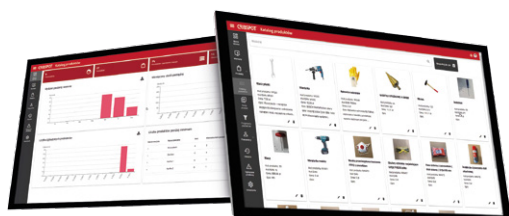


CRIBLOCKER is a **modern** and **self-service** vending machine used for product distribution. The modular design gives the possibility to store up to **128* unique items of different sizes**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Two product loading options** enable even faster and simpler filling the machine. The **CRIBLOCKER** has a built-in **RFID reader, barcode** and **QR code scanner** which supports the **product return function**.

*1256 – maximum number of lockers in combination with drawers

TECHNICAL SPECIFICATIONS

Height [mm]	2 000
Width [mm]	1 120
Depth [mm]	600
Voltage [V]	230 VAC – 50 Hz
Power usage [W]	5/80
Max. load of the locker [kg]	50*
Max. drawer load [kg]	100
Weight[kg]	295
Temp. [°C]	from 5 to 70

*with the possibility of increasing the locker's allowable load

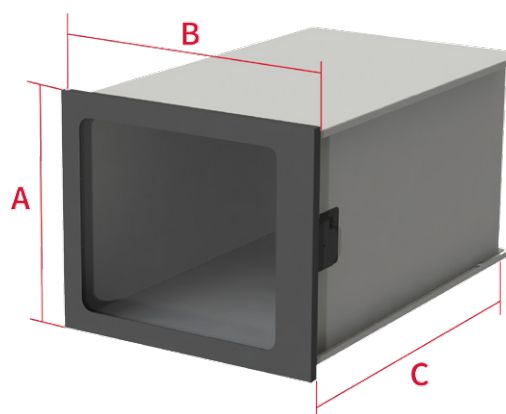

LOCKER CONFIGURATIONS

NUMBER OF LOCKERS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]
128	130	50	562
64	130	144	562
32	288	144	562
16	288	328	562
9	602	328	562
5	602	512	562