

CRIBSTOCK 1260



COST REDUCTION



TIME SAVING



CONTROL



REPORTING



24/7 ACCESS

CRIBSPOT®

CRIBSPOT® INTERNATIONAL SP.Z O.O
Poland, 55-100 Trzebnica, Nowy Dwór 53
Tel.: +48 665 477 237
Email: kontakt@cribspot.eu



www.cribspot.eu

CRIBSTOCK 1260

Innovative and reliable **Multifunctional Vending Machine**, compliant with the concept of industry 4.0.



CRIBSTOCK 1260 is a modern and **self-service** vending machine used for product distribution. The rotating, sturdy drum gives you the ability to storage **up to 1260 unique items**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Four product loading options** enable even faster and simpler filling the machine. The **CRIBSTOCK 1260** has a built-in **RFID reader, barcode and QR code scanner**.


KEY FEATURES

- **24/7 access.**
- Drop in the consumption of products by **up to 50%**.
- Very large capacity, **up to 1260 compartments** in the machine.
- **4 options for loading products** into the machine.
- **21" touch screen** with modern and intuitive interface.
- **9 configurations** for height and width of compartments.
- Built-in **RFID reader, barcode and QR code scanner**.
- **Monitoring of current status** via the **IRSYSTEM** web application.
- **Modularity** allows to combine devices into sets.

IRSYSTEM APPLICATION

For each machine we offer proprietary **IRSYSTEM software** tailored to individual customer needs, which opens up **unlimited possibilities for remote process management**. **IRSYSTEM** enables **data migration** and fast communication between the server and machine.


- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- automatic **generation of reports** and orders
- real-time **preview of available stock levels** inside the machine
- management of employee **access authorisation** to the machine

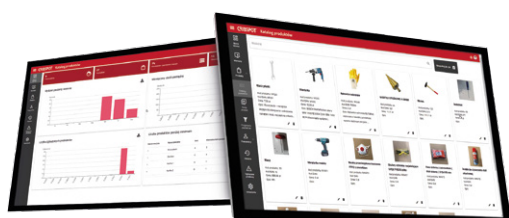

TECHNICAL SPECIFICATIONS

Height [mm]	2 000
Width [mm]	1 360
Depth [mm]	1 100
Voltage [V]	230 VAC – 50 Hz
Power usage [W]	5/80
Max. drum load [kg]	400
Dry mass [kg]	670
Temp. [°C]	from 5 to 70

DRUM CONFIGURATIONS

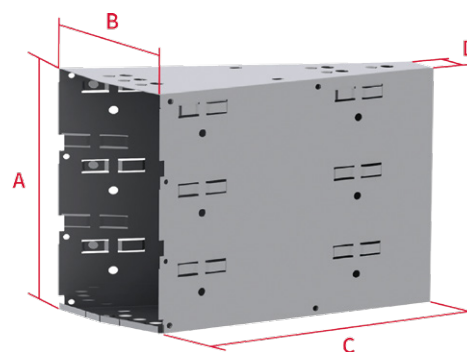

COMPARTMENS CONFIGURATIONS AND DIMENSIONS

NUMBER OF COMPARTMENTS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]	D WIDTH [MM]
1260	80	50	405	12
840	80	80	405	18
420	80	160	405	35
660	160	50	405	12
440	160	80	405	18
220	160	160	405	35
420	245	50	405	12
280	245	80	405	18
140	245	160	405	35